


材质：书写纸
尺寸：66*90
装裱方式：折页
单色印刷 正反印刷

注意：成品无黑色边框

Bluetooth 5.0 Long Range
Transmitter Receiver

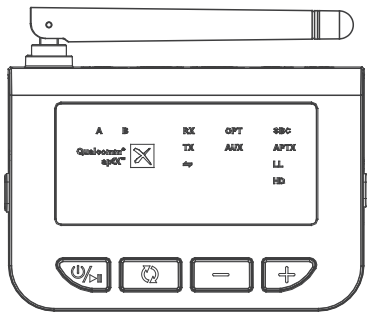


User Manual

Specification:

Bluetooth Version:	Bluetooth 5.0+EDR, Class 1
Bluetooth Frequency Range:	2.402-2.480GHz
Model:	BT5804
Bluetooth Range:	70Meters
Bluetoth Profile:	A2DP AVRCP
Music Format Codec:	Aptx-HD, Aptx-LL Aptx, SBC.bu
Charging Voltage:	DC+5V
Working Current:	About 70-90mA in Receiver Mode, About 60-220mA in Transmitter Mode, about 50mA in By-Pass Mode.

Product Diagram

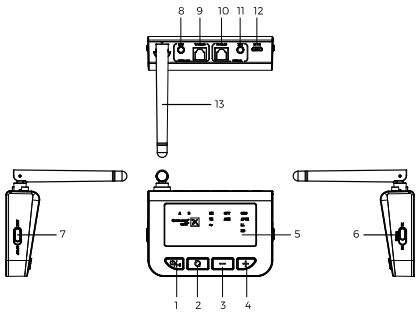

1. MFB: Multifunctional Button, Power On/Off, Play/Pause

2. Bluetooth Pairing Button

3. Vol-/Prev Track

4. Vol+ Next Track

5. Indicator

6. RX/TX/By-Pass Switch

7. SPDIF/AUX Switch

8. Aux 3.5mm Output Port for Speaker

9. SPDIF optical Output Port for speaker

10. SPDIF optical Input Port for TV

11. Aux 3.5mm Input Port for TV

12. Micro USB DC+5V Charging Port

13. Antanna

Basic Operation

Power On: Connect Micro usb Charging Cable with BT5804 in the micr usb charging port in one end, and with DC+5V Power Adapter in another end, then press the MFB for 2 sec, BT5804 will power on, Screen indicator will glow.

Power Off: When BT5804 is on, cut off the power supply or press the MFB for 3 sec to power off, and indicator will go off.

RX/TX/By-Pass Switch:
Switch to Relative Mode
TX as Bluetooth Transmit Mode
RX as Bluetooth Receive Mode
By-Pass as By-Pass Mode

SPDIF/ Aux Switch:
Switch to Relative Mode
SPDIF- Optical digital audio input/output for optical cable
Aux- Stereo Analog Audio Input/Output for aux cable

Bluetooth Pairing Button:
When BT5804 power on, short press the bluetooth pairing Button to enter pairing mode. Indicator will flash rapidly
When BT5804 is paired with 1st or 2nd bluetooth device, long press the bluetooth pairing button for 3 sec to disconnect the current paired device to enter pairing mode again, and indicator will flash rapidly.

Music Control

Mute On/Off: When BT5804 is streaming the music, press the MFB button to Mute on, press again to Mute Off.
Next Song: Short press "+"
Previous Song: Short Press the "-"
Volume Plus: Long press "+" (Prompt when Max)
Volume Minus: Long press "-" (Prompt when Min)
Note: Music Control button will work in Transmit/Receive/-By-Pass Mode, AUX/OPT mode, but Plus and Minus Button won't work in Optical&Transmit Mode.

Receive Mode:
Pair with your 1st Bluetooth-Enabled Phone
1: Switch BT5804 to RX mode, and Switch to OPT Mode or Aux Mode if Connect your speaker with BT5804 via 3.5mm audio cable in Aux output port, or via optical cable in optical output port.
2: Power on BT5804, press the bluetooth Pairing Button to enter pairing mode, then RX indicator will flash rapidly.
3: Enable your phone with bluetooth function, search the bluetooth device to find "BT5804", select and Click to pair, A indicator will stay on if successfully paired.
4: Key in "0000" as password if necessary.

Pair with your 2nd Phone
1: After successfully paired with your 1st phone, press the bluetooth pairing button again to enter pairing mode. RX Indicator will flash rapidly.
2: Enabled your 2nd phone with bluetooth function, and pair as you did for the 1st Phone.

3: B indicator will stay on if successfully paired, then BT5804 is paired with 2 phones simultaneously, then you can enjoy the music by switch between your phones.

Transmit Mode:
Pair with your 1st Bluetooth Headphone
1: Switch BT5804 to TX mode, and Switch to OPT Mode or Aux Mode if Connect your TV with BT5804 via 3.5mm audio cable in Aux input port, or via Optical cable in optical input port.
2: Power on BT5804, press the bluetooth Pairing Button to enter pairing mode, then TX indicator will flash rapidly.
3: Power on your bluetooth headphone to pair, and A indicator will stay on if successfully paired.

Pair with your 2nd Bluetooth Headphone
1: After successfully paired with your 1st Bluetooth headphone, press the bluetooth pairing button again to enter pairing mode. TX Indicator will flash rapidly.
2: Power on your 2nd bluetooth headphone to pair, B indicator will stay on if successfully paired, then BT5804 is paired with 2 bluetooth headphones simultaneously, then you can enjoy the music with your companion.

By-Pass Mode:
1: Connect BT5804 with your TV via 3.5mm/optical audio cable in 3.5mm/optical audio input port.
2: Power on BT5804, and switch to By-Pass Mode, and switch to SPDIF or AUX mode if you connect BT5804 with TV via SPDIF Cable or Aux 3.5mm cable.


3: Connect BT5804 with your speaker via 3.5mm/optical audio cable in 3.5mm/optical audio output port.
4: Then the speaker will play the same audio from TV through BT5804 in By-Pass Mode.

Bluetooth Reconnecting
1. In RX Mode:
Situation 1: Power on to reconnect: Power on BT5804, then it will enter pairing&reconnecting mode, RX indicator will flash slowly within 30 seconds; If no reconnecting, then enter pairing mode after 30 seconds, RX indicator will flash rapidly.
Situation 2: Beyond Bluetooth Range: if your bluetooth-enabled Mobilephone is beyond the bluetooth range, BT5804 will disconnect the bluetooth, RX indicator will flash rapidly, and enter pairing&reconnecting mode within 10 minutes. If reconnecting is successful, RX indicator will stay on; otherwise BT5804 will turn to sleep mode.
2. In TX Mode:
Situation 1: Power on to reconnect: Power on BT5804, then it will enter reconnecting mode, TX indicator will flash slowly within 30 seconds. If reconnecting fails, then enter pairing mode after 30 seconds, TX indicator will flash rapidly.
Situation 2: Beyond Bluetooth Range: if your bluetooth headphone is beyond the bluetooth range, BT5804 will disconnect the bluetooth, TX indicator will flash slowly, and enter reconnecting mode within 30 seconds. If reconnecting fails, then BT5804 will enter pairing mode, TX indicator will flash rapidly; if pairing fails within 10 minutes, then BT5804 will turn to sleep mode.

Clear Bluetooth Paired List
When BT5804 is on, long press the Bluetooth Pairing Button for about 8 sec, until the TX or RX Indicator flash twice (beep twice in RX Mode, no beep in TX mode), then BT5804 will be cleared of the the bluetooth paired list, to enter pairing mode.

Sleep Mode:
1: When BT5804 is on in RX/TX mode, and bluetooth pairing is disconnected for 10 minutes, BT5804 will turn to sleep mode automatically, the indicator of RX or TX, and OPT or Aux will stay on.
2: Press any button to active BT5804
3: No sleep mode when in By-Pass Mode.

Note:
1: Please do connect micro usb cable with DC+5V power adapter to supply power to avoid abnormal working.
2: Enjoy better music by trying your best to place BT5804 in a barrier-free environment, so that the bluetooth signal will be less blocked or absorbed by surrounding objects.

CORRECT DISPOSAL OF THIS PROD-UCT
 Waste Electrical& Electronic Equipment)
This Marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life.

To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources. Household user should contact either the retailer where they purchased this product or their local government office for details of where and how they can take this item for environmentally safe recycling. Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

- 5 -

- 6 -

- 7 -

- 8 -